


## MP Serial

## MaxiPark

MP-Serial is a serial communication unit, which can communicate with e.g. MP-Displays.

### MP-Serial/1



The trunk mounted version is snapped on the trunking.

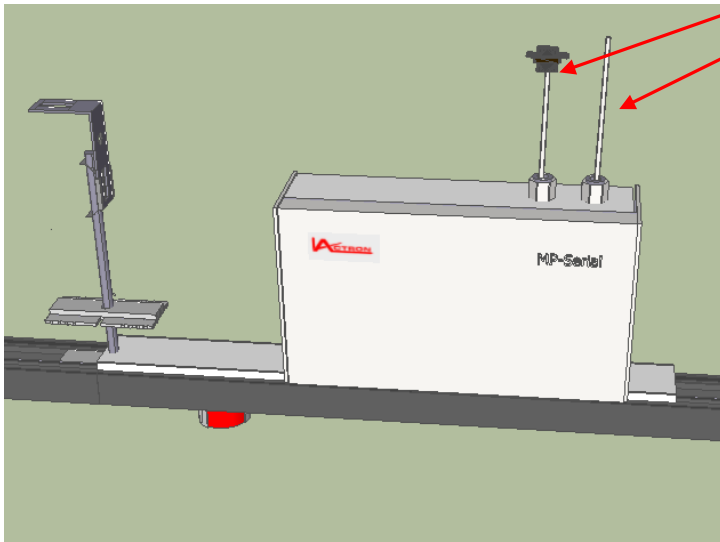

There is a RS232 cable and a 220 V AC Power supply on the top.

Both can be dragged out to a distance of 11 m.

The power supply cable will only be used if the power cable is laid in the trunking. Else there must be a separate Power supply outlet to the Display.

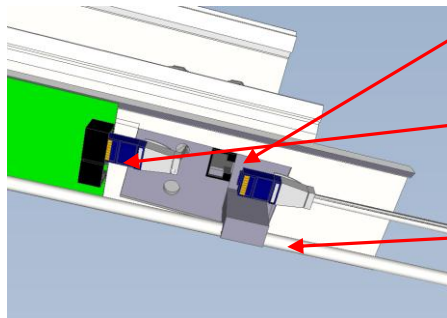
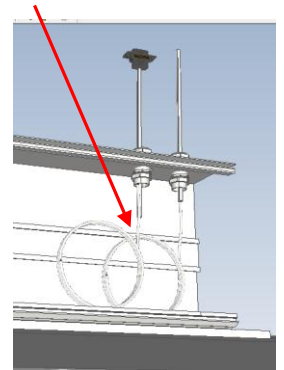


There is a RJ45 contact to the IEX (Can bus) available on the Bottom side of the MP serial.

There is also one IEX (Can bus) cable in return from the unit which is connected to IEX RJ45 contact of MP-Sens

Possible Power supply cable in the trunking.

Display connection

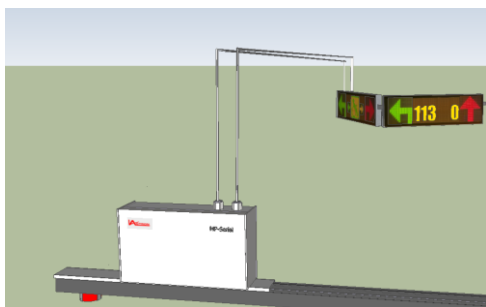

RS232 contact Power



Part no. MP-Serial/1

### MP-Serial/2

The MP-Serial/2 has the IEX to RS232 Converter built into the Display

Part no. MP-Serial/2

